

BANCHI PASTICCERIA

PASTRY BENCH



DELUXE 92 PSV

Banco pasticceria quattro lati vetro ventilato, porte scorrevoli. 2 Ripiani.
Ventilated positive four-sided glass pastry bench, sliding doors. 2 Shelves.



DELUXE 122 PSV

Banco pasticceria quattro lati vetro ventilato, porte scorrevoli. 2 Ripiani.
Ventilated positive four-sided glass pastry bench, sliding doors. 2 Shelves.



DELUXE 152 PSV

Banco pasticceria quattro lati vetro ventilato, porte scorrevoli. 2 Ripiani.
Ventilated positive four-sided glass pastry bench, sliding doors. 2 Shelves.





Ripiani: vetro temperato, frontale acciaio
Shelves: tempered glass, stainless steel front



Termostato elettronico
Electronic thermostat



Esterno acciaio specchiato, vetro lucido nero
Body mirror stainless steel, black shiny mirror

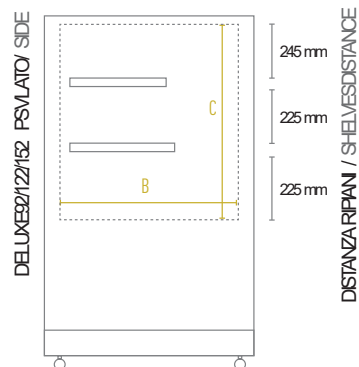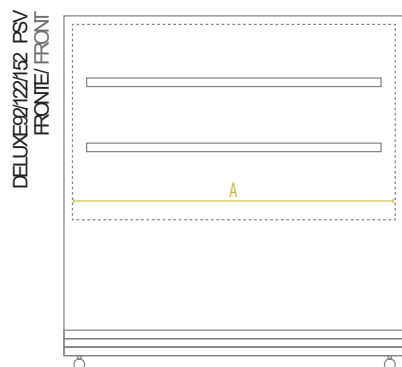

Dimensioni mm / Dimensions mm	DELUXE92 PSV	DELUXE122 PSV	DELUXE152 PSV
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	900 x 740 x 1200	1200 x 740 x 1200	1500 x 740 x 1200
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	980 x 830 x 1330	1280 x 830 x 1330	1580 x 830 x 1330
A - Larghezza / Width	840	1140	1440
B - Profondità / Depth	630	630	630
C - Altezza / Height	690	690	690

Caratteristiche Tecniche / Technical Features	DELUXE92 PSV	DELUXE122 PSV	DELUXE152 PSV
Temperatura / Temperature Range	+2 °C / +10 °C	+2 °C / +10 °C	+2 °C / +10 °C
Classe Climatica / Climate Class	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 370 / 415	Lt. 495 / 555	Lt. 620 / 700
Superficie Esterna / Body	Acciaio AISI 304 Stainless steel AISI 304	Acciaio AISI 304 Stainless steel AISI 304	Acciaio AISI 304 Stainless steel AISI 304
Superficie Interna / Inner Liner	Acciaio AISI 304 a specchio Mirror stainless steel AISI 304	Acciaio AISI 304 a specchio Mirror stainless steel AISI 304	Acciaio AISI 304 a specchio Mirror stainless steel AISI 304
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Smart Link WiFi Controllo remoto / Remote controller	Optional	Optional	Optional
Rumorosità / Noise level	dB 45	dB 50	dB 55
Spessore isolamento / Insulation thickness	mm 45	mm 45	mm 45
Sbrinatorio / Defrost	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle
Illuminazione / Lighting	3 Led orizzontali / Horizontal	3 Led orizzontali / Horizontal	3 Led orizzontali / Horizontal
Mensole in vetro temperato (LxP) / Tempered glass shelves (WxD)	N°1 mm 738 x 278 N°1 mm 738 x 318	N°1 mm 1038x278 N°1 mm 1038x318	N°1 mm 1338x278 N°1 mm 1338x318
Ruote-Piedi / Castors-Feet	4 Ruote / 4 Castors	4 Ruote / 4 Castors	4 Ruote / 4 Castors
Peso Netto-Lordo / Net-Gross Weight	Kg 155 / 195	Kg 185 / 230	Kg 220 / 270
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290	R290
Assorbimento / Absorption	W 360	W 410	W 525
Consumo Energia / Energy Consumption	KwH/24H 5,2	KwH/24H 6,4	KwH/24H 7,5

BANCHI PASTICCERIA

PASTRY BENCH



DELUXE 93 PSV

Banco pasticceria quattro lati vetro ventilato, porte scorrevoli. 3 Ripiani.
Ventilated positive four-sided glass pastry bench, sliding doors. 3 Shelves.

DELUXE 123 PSV

Banco pasticceria quattro lati vetro ventilato, porte scorrevoli. 3 Ripiani.
Ventilated positive four-sided glass pastry bench, sliding doors. 3 Shelves.

DELUXE 153 PSV

Banco pasticceria quattro lati vetro ventilato, porte scorrevoli. 3 Ripiani.
Ventilated positive four-sided glass pastry bench, sliding doors. 3 Shelves.




Ripiani: vetro temperato, frontale acciaio
Shelves: tempered glass, stainless steel front



Porta scorrevole
Sliding door



Esterno acciaio specchiato, vetro lucido nero
Body mirror stainless steel, black shiny mirror

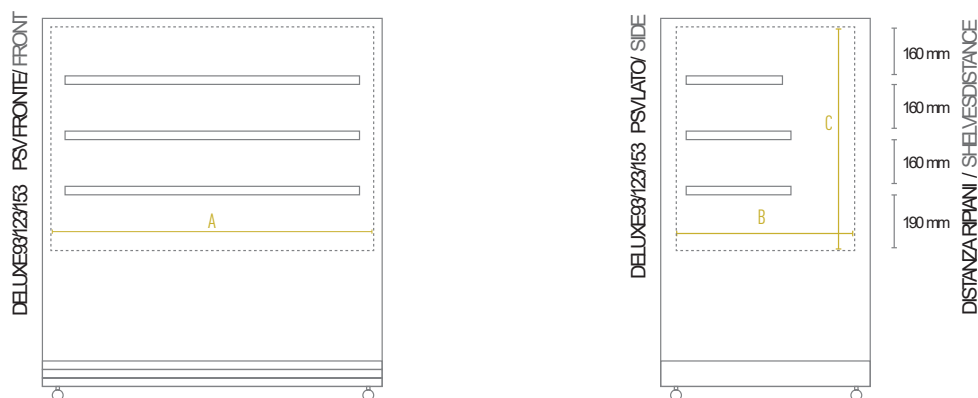

Dimensioni mm / Dimensions mm	DELUXE93 PSV	DELUXE123 PSV	DELUXE153 PSV
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	900 x 740 x 1300	1200 x 740 x 1300	1500 x 740 x 1300
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	980 x 830 x 1430	1280 x 830 x 1430	1580 x 830 x 1430
A - Larghezza / Width	840	1140	1440
B - Profondità / Depth	630	630	630
C - Altezza / Height	790	790	790

Caratteristiche Tecniche / Technical Features	DELUXE93 PSV	DELUXE123 PSV	DELUXE153 PSV
Temperatura / Temperature Range	+2 °C / +10 °C	+2 °C / +10 °C	+2 °C / +10 °C
Classe Climatica / Climate Class	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 415 / 460	Lt. 550 / 610	Lt. 690 / 770
Superficie Esterna / Body	Acciaio AISI 304 Stainless steel AISI 304	Acciaio AISI 304 Stainless steel AISI 304	Acciaio AISI 304 Stainless steel AISI 304
Superficie Interna / Inner Liner	Acciaio AISI 304 a specchio Mirror stainless steel AISI 304	Acciaio AISI 304 a specchio Mirror stainless steel AISI 304	Acciaio AISI 304 a specchio Mirror stainless steel AISI 304
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Smart Link WiFi Controllo remoto / Remote controller	Optional	Optional	Optional
Rumorosità / Noise level	dB 45	dB 50	dB 55
Spessore isolamento / Insulation thickness	mm 45	mm 45	mm 45
Sbrinatorio / Defrost	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle
Illuminazione / Lighting	4 Led orizzontali Horizontal	4 Led orizzontali Horizontal	4 Led orizzontali Horizontal
Mensole in vetro temperato (LxP) / Tempered glass shelves (WxD)	N°1 mm 738x278 N°2 mm 738 x 318	N°1 mm 1038x278 N°2 mm 1038x318	N°1 mm 1338x278 N°2 mm 1338x318
Ruote-Piedi / Castors-Foot	4 Ruote / 4 Castors	4 Ruote / 4 Castors	4 Ruote / 4 Castors
Peso Netto-Lordo / Net-Gross Weight	Kg 170 / 215	Kg 205 / 255	Kg 245 / 300
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290	R290
Assorbimento / Absorption	W 370	W 420	W 535
Consumo Energia / Energy Consumption	KwH/24H 5,9	KwH/24H 7,2	KwH/24H 8,3