


FRIGO VETRINE VERTICALI VISICOOLER



GN 400 G TN

Armadio frigo statico con agitatore, porta vetro. Temperatura positiva.
Static-fan assisted cabinet, glass door.
Positive temperature.



GN 400 G TN BLK

Armadio frigo statico con agitatore, porta vetro. Temperatura positiva.
Static-fan assisted cabinet, glass door.
Positive temperature.

Capienza/ Capacity	GN400 GTN - GN400 GTN BLK
Bottiglia lt. 1 / Bottle lt. 1	60
Bottiglia cl. 75 / Bottle cl. 75	85
Bottiglia cl. 66 / Bottle cl. 66	90
Bottiglia cl. 50 / Bottle cl. 50	198
Bottiglia cl. 33 / Bottle cl. 33	182
Lattina cl. 33 / Can cl. 33	228

Dati indicativi e variabili a seconda dei diversi packaging / Variable data depending on the different packaging




Maniglia integrata
Built-in handle



Termostato elettronico
Electronic thermostat



Porta vetro senza cornice
Full glass frameless door

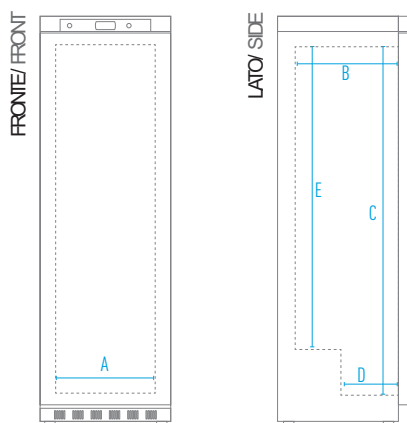

Dimensioni mm / Dimensions mm	GN400 GTN - GN400 GTN BLK
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	600 x 625 x 1860
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	660 x 725 x 2000
A - Larghezza / Width	457
B - Profondità / Depth	474
C - Altezza / Height	1600
D - Profondità Min. / Min. Depth	264
E - Altezza Min. / Min. Height	1390
Adesivo Laterale / Side Sticker	525 x 1850
Adesivo Vetro / Glass Sticker	408 x 1477

Caratteristiche Tecniche / Technical Features	GN400 GTN - GN400 GTN BLK
Temperatura / Temperature Range	+2 °C / +10 °C
Classe Climatica / Climate Class	4
Capacità / Capacity	Lt. 400
Superficie Esterna Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	ABS
Termostato / Thermostat	Elettronico / Electronic
Rumorosità / Noise level	dB 45,9
Smart Link WiFi Controllo remoto / Remote controller	Optional
Spessore isolamento / Insulation thickness	mm 70
Sbrinamento / Defrost	Automatico / Automatic
Illuminazione / Lighting	2 Led Verticali / 2 vertical led
Chiusura automatica porta / Self closing door	Si / Yes
Chiave e serratura / Lock and key	Si / Yes
Reversibilità porta / Reversible door	No
Mensole (LxP) / Shelves (WxD)	N° 5 - mm 652 x 542 + N° 1 - mm 652 x 347
Ruote-Piedi / Castors-Feet	2 Piedi + 2 Ruote / 2 Feet + 2 Castors
Porta / Door	Vetro temperato / Tempered Glass
Peso Netto-Lordo / Net-Gross Weight	Kg 75 / 88
Voltaggio / Voltage	V 220-240
Frequenza / Frequency	Hz 50
Refrigerante / Refrigerant	R600A
Assorbimento / Absorption	W 235
Consumo Energia / Energy Consumption	Kwh/24H 2,02