

CONGELATORI SOPRA BANCO COUNTERTOP DISPLAY FREEZER



FR 40 FL BLK

Freezer soprabanco statico.
Static countertop display freezer.



FR 40 FL WHT

Freezer soprabanco statico.
Static countertop display freezer.



FR 92 FL WHT

Freezer soprabanco statico.
Static countertop display freezer.



FR 92 FL BLK

Freezer soprabanco statico.
Static countertop display freezer.





Porta vetro senza cornice
Full glass frameless door



Mensole rimovibili
Removable shelves



Termostato digitale
Digital thermostat

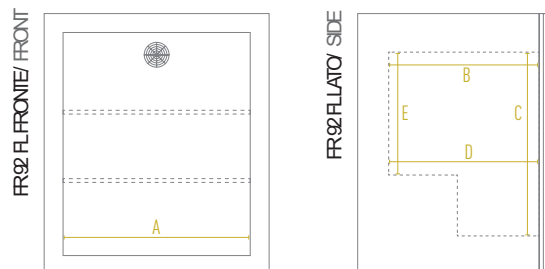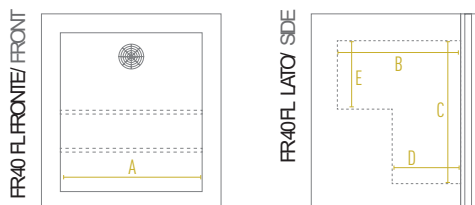

Dimensioni mm / Dimensions mm	FR40 FL	FR92 FL
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	475 x 435 x 520	595 x 520 x 690
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	520 x 465 x 650	635 x 560 x 820
A - Larghezza / Width	391	542
B - Profondità / Depth	326	398
C - Altezza / Height	378	486
D - Profondità Min. / Min. Depth	181	205
E - Altezza Minima / Min. Height	181	324
Adesivo Laterale / Top Sticker	447 x 455	467 x 645
Adesivo superiore / Canopy Sticker	591 x 457	591 x 466
Adesivo Vetro / Glass Sticker	326 x 339	438 x 495

Caratteristiche Tecniche / Technical Features	FR40 FL	FR92 FL
Temperatura / Temperature Range	-23 °C / -18 °C	-23 °C / -18 °C
Classe Climatica / Climate Class	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 36 / 40	Lt. 88 / 92
Superficie Esterna / Body	ABS	ABS
Superficie Interna / Inner Liner	Alluminio / Aluminum	Alluminio / Aluminum
Porta / Door	Porta vetro senza cornice Full glass frameless door	Porta vetro senza cornice Full glass frameless door
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 42	dB 42
Spessore isolamento / Insulation thickness	mm 55	mm 55
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual
Illuminazione / Lighting	1 Led sul lato superiore 1 Led on top side	1 Led sul lato superiore 1 Led on top side
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes
Reversibilità porta / Reversible door	No	No
Mensole (LxP) / Shelves (WxD)	N° 2 - mm 350 x 145	N° 2 - mm 455 x 376
Ruote-Piedi / Castors-Feet	4 Piedi / 4 Feet	4 Piedi / 4 Feet
Peso Netto-Lordo / Net-Gross Weight	Kg 26 / 32	Kg 36 / 44
Voltaggio / Voltage	V 220	V 220
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290
Assorbimento / Absorption	W 240	W 285
Consumo Energia / Energy Consumption	KwH/24H 6,875	KwH/24H 8,529